




## RS300i Rugged Rack Mount 3U server

---

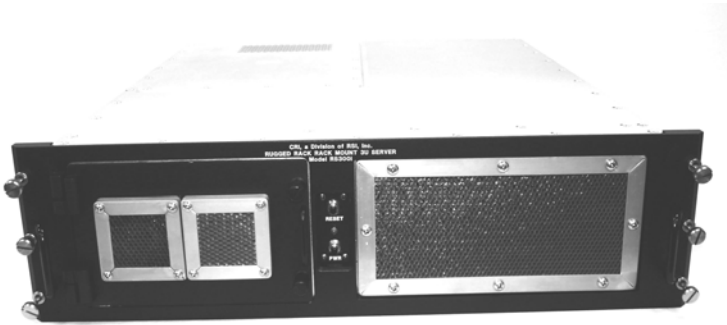


- Quality
- Performance
- High availability
- Leading edge
- Rugged
- Windows/Linux OS

**Dimensions:**  
**19"W x 20"D x 5.25"H**

- Any ATX or Extended ATX Motherboard
- Up to Dual Dual Core or Dual Quad Core CPU
- Up to 32 GB RAM
- Up to 4 x SAS or SATA HDDs
- DVD-RW

### **Rugged Features:**

- Corrosion resistant  
all aluminum chassis w/slides
- Designed to:
  - Mil-S-901D Grade A
  - Mil-S-810F shock & Vibe  
completed qualification tests  
for propeller driven aircraft
  - Mil-S-167 Vibration
- Shock/Vibration Isolated drives
- Positive captivation of all expansion cards
- Designed to Mil-Std 461 EMI/EMC
- Dust/EMI filters
- Operating temperature: 0-45°C
- Storage temperature: -40-+71°C

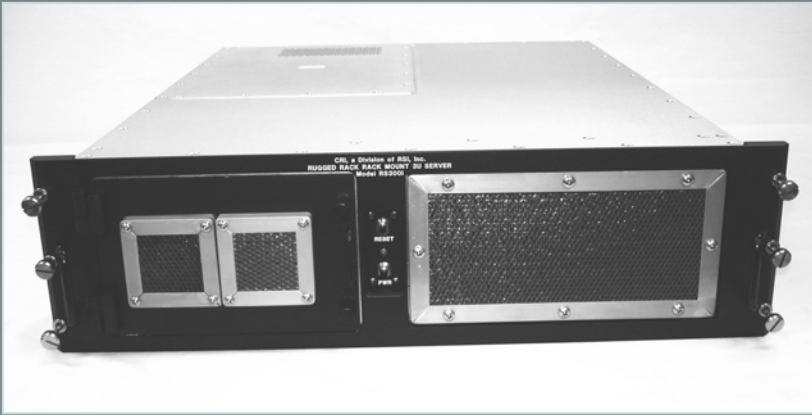

### RS300i Front View

- Power & Reset
- ½" Machined Front Panel
- 6 Captive Attachment Screws
- Access Door to Drives
- EMI/Dust Filters



### Front View

- Drive Access Open
- EMI Gaskets around door
- Drives on Isolation System
- Dual Fans



### Side View

- All Aluminum Chassis
- Top Access Panel for PCI Cards
- Heavy Duty Rails
- Handles
- Screws Spaced for Gap Control



### Rear View

- Standard AC or DC Power
- I/O and expansion slots based on MB selection